

## KAMIQ - K6

**High directivity line source speaker & active subwoofer**



### FEATURES

- **Arrayable line source speaker**
- **Increased intelligibility due to unique wave guide design**
- **DSP enabled dual 15" active long throw subwoofers provides deep bass**
- **Various mounting options with pole, wall and flying hardware**
- **Can be used for portable or fixed installation applications**
- **Plug-and-play operation**


The KAMIQ-K6 from the Alpha Acoustics® family is a unique arrayable column speaker which is powered by an active DSP enabled subwoofer. This combo provides high SPLs for traveling bands as well as high intelligibility for mid-sized auditoriums and houses of worship.

The KAMIQ- K6SAT contains 4pcs of 6.5" drivers and 2pcs of 34mm horn loaded HF drivers. The unique design of the horn, enables stacking one column array on top of the other which delivers uniform coverage of upto 30m. Due to the controlled vertical dispersion, the K6SAT ensures great intelligibility in highly reverberant facilities. The unobtrusive design of the satellite speaker also ensures minimal interference with the aesthetics of the facility.


Along with the KAMIQ-K6SUB, which is a dual 15" subwoofer that has a built in DSP and amplifier, the KAMIQ system is able to pack up a punch above the rest.

### FLEXIBLE CONFIGURATIONS

A. POLE MOUNT

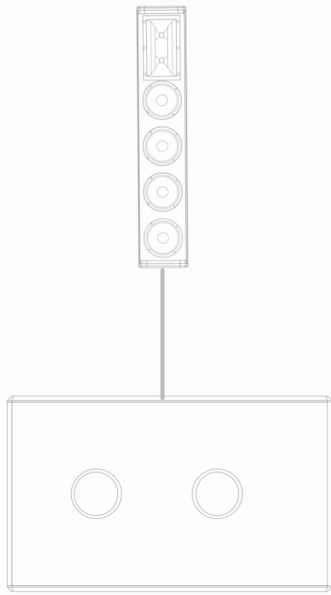


B. FLYING

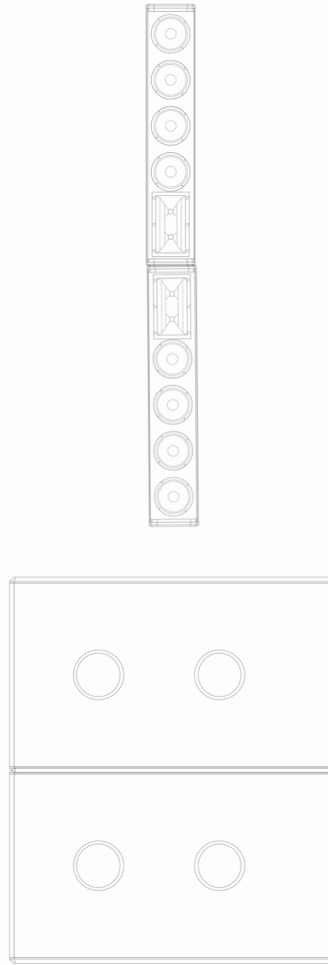


C. HORIZONTAL



KAMIQ - KSAT DIMENSIONS

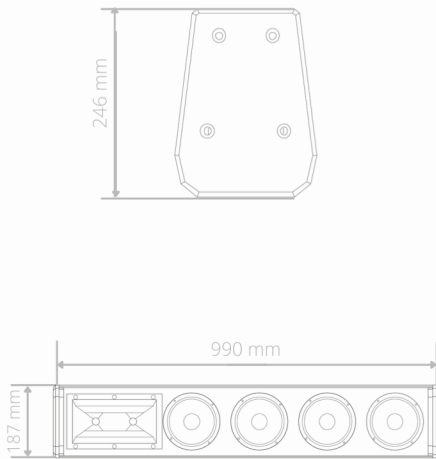

KAMIQ - KSUB DIMENSIONS

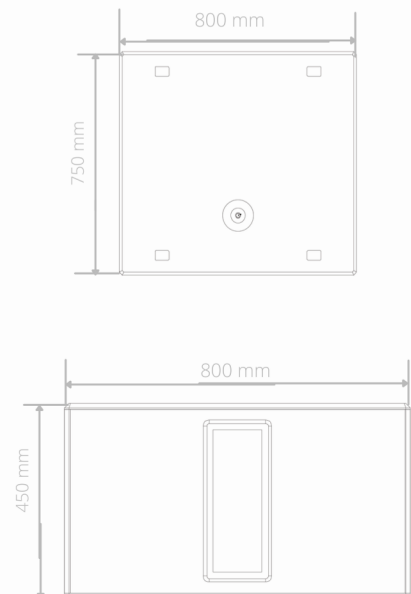

**KAMIQ - K6SAT SPECIFICATIONS**

Frequency response	80Hz - 20 kHz
Transducers	LF : 4 X 6.5" HF : 2 X 1.5" , compression driver
Directivity	100° (H) X 10° (V)
Sensitivity	98 dB
Maximum SPL	128 dB
Impedence	8 Ω
Long term power	500 W
Peak Power	1000 W
Connector	2 X 4 pin neutrik speakon
Dimensions	187 X 246 X 990 mm
Net weight	14.5 Kg

**KAMIQ - K6SUB SPECIFICATIONS**

Frequency response	40Hz - 320 Hz
Transducers	LF : 2 X 15"
Sensitivity	103 dB
Maximum SPL	135 dB
Impedence	4 Ω
Long term power	1000 W
Peak Power	2000 W
Connector	XLR (input) / Speakon (for K6SAT)
Amplifier power	700W (for K6SAT) + 1000W (K6SUB)
PC Interface	USB 2.0
Dimensions	800 X 750 X 450 mm
Net weight	59.5 Kg

**APPLICATIONS**

**Amphitheatres | Conference Halls | Auditoriums | Hotel Ball rooms  
Houses of worship | Travelling musicians & bands**

*\*Specifications subject to change without notice. 01/2023*

**Head Office**

Alpha Acoustics  
Vinecká 1,  
293 01 Mladá Boleslav  
Czech Republic  
info@alphacoustics.com

**EMEA Office**

Alpha Acoustics DWC-LLC  
BUILDING A3, Office No. DLC-BC-A3-3-OSSD6-04  
Dubai South Business Center,  
Dubai Logistics City  
Dubai, United Arab Emirates

## KAMIQ - K6 ORDERING INFORMATION

**KAMIQ K6SAT** : 4 X 6.5" column speaker (sold in pairs)

**KAMIQ K6SUB** : 2 X 15", 2000W Active Sub-woofer

### **Accessories :**

**KAMIQ K6 Mounting pole** : Mounting pole that connects K6SUB and K6SAT

**KAMIQ K6 suspension bracket** : Flying hardware for K6SAT

**KAMIQ K6 side connection bar** : Connection hardware to couple 2 X K6SAT

**KAMIQ K6 wall mounting bracket** : Wall mounting bracket for K6SAT

*\*Specifications subject to change without notice. 01/2023*

#### **Head Office**

Alpha Acoustics  
Vinecká 1,  
293 01 Mladá Boleslav  
Czech Republic  
info@alphacoustics.com

#### **EMEA Office**

Alpha Acoustics DWC-LLC  
BUILDING A3, Office No. DLC-BC-A3-3-OSSD6-04  
Dubai South Business Center,  
Dubai Logistics City  
Dubai, United Arab Emirates