

# KAMIQ - K9

## High SPL Arrayable Column speaker with variable horizontal dispersion and dual 15" active Sub with built in DSP.

### FEATURES

- **High SPL - 131dB**
- **70 ° , 90 ° or 110 ° horizontal variable coverage angle**
- **K9 SAT provides good low end with 3X9" LF drivers**
- **DSP enabled dual 15" active long throw subwoofers provides deep bass with separate Sub Aux input**
- **Various mounting options with pole, wall and flying hardware**
- **Can be used for portable or fixed installation applications**
- **Plug-and-play operation**

The KAMIQ-K9 from the Alpha Acoustics® family is a unique arrayable column speaker which is powered by an active DSP enabled subwoofer. This combo provides high SPLs for traveling bands as well as high intelligibility for mid-sized auditoriums and houses of worship.




The KAMIQ- K9SAT contains 3pcs of 9" drivers and 1pcs of 3" Compression driver driver. The unique design of the horn, enables stacking one column array on top of the other which delivers uniform coverage of upto 35m. The horizontal dispersion of the K9SAT can be adjusted to suit the location from narrow to wide halls. The unobtrusive design of the satellite speaker also ensures minimal interference with the aesthetics of the facility.


Along with the KAMIQ-K9SUB, which is a dual 15" subwoofer that has a built in DSP, amplifier and separate sub aux input, the KAMIQ K9 system is able to pack up a punch above the rest.

### FLEXIBLE CONFIGURATIONS


A. POLE MOUNT

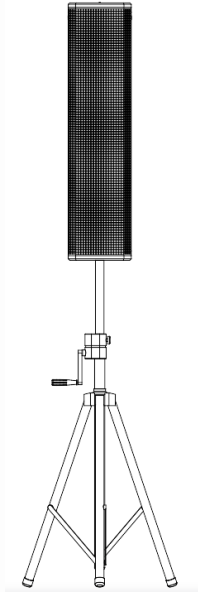


B. FLYING

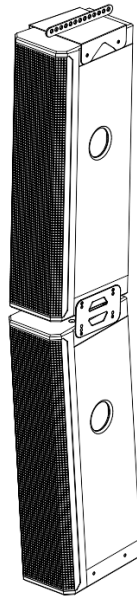


C. GROUND STACK

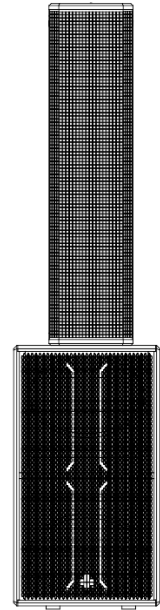

KAMIQ - K9SAT DIMENSIONS

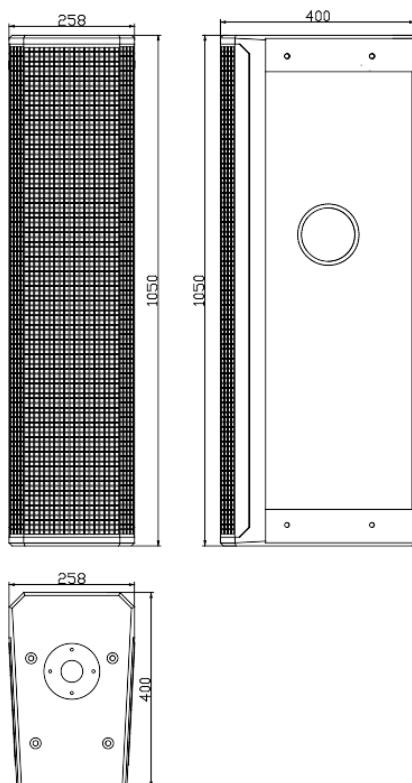

KAMIQ - K9SUB DIMENSIONS

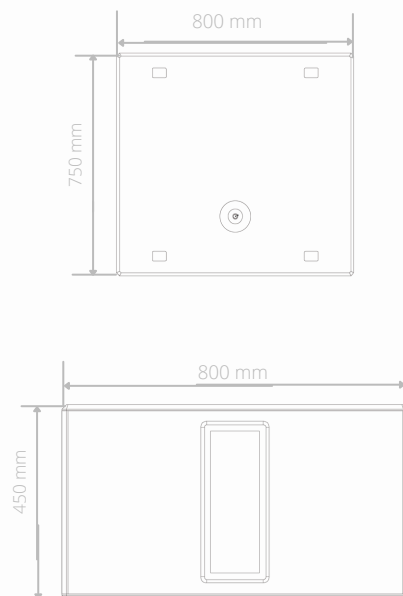

**KAMIQ - K9SAT SPECIFICATIONS**

Frequency response	55Hz - 20 kHz
Transducers	LF : 3 X 9" HF : 1 X 3" , compression driver
Directivity	70,90,110° (H) X 25° (V)
Sensitivity	97 dB
Maximum SPL	131 dB
Impedence	5 Ω
Long term power	700 W
Peak Power	2800 W
Connector	2 X 4 pin neutrik speakon
Dimensions	258 X 400 X 1050 mm
Net weight	38 Kg

**KAMIQ - K9SUB SPECIFICATIONS**

Frequency response	40Hz - 320 Hz
Transducers	LF : 2 X 15"
Sensitivity	103 dB
Maximum SPL	139 dB
Impedence	4 Ω
Long term power	1000 W
Peak Power	4000 W
Connector	XLR (input) / Speakon (for K6SAT)
Amplifier power	900W (for K9SAT) + 900W (K9SUB)
PC Interface	USB 2.0
Dimensions	800 X 750 X 450 mm
Net weight	59.5 Kg

**APPLICATIONS**

**Amphitheatres | Conference Halls | Auditoriums | Hotel Ball rooms  
Houses of worship | Travelling musicians & bands**

*\*Specifications subject to change without notice. 01/2023*

**Head Office**

Alpha Acoustics  
Vinecká 1,  
293 01 Mladá Boleslav  
Czech Republic  
info@alphacoustics.com

**EMEA Office**

Alpha Acoustics DWC-LLC  
BUILDING A3, Office No. DLC-BC-A3-3-OSSD6-04  
Dubai South Business Center,  
Dubai Logistics City  
Dubai, United Arab Emirates

## KAMIQ - K9 ORDERING INFORMATION

**KAMIQ K9SAT** : 3 X 9", 2800W(peak) column speaker (sold in pairs)

**KAMIQ K9SUB** : 2 X 15", 4000W(peak) Active Sub-woofer

### **Accessories :**

**KAMIQ K9 flying bracket** : Flying hardware for K9SAT

**KAMIQ K9 interconnection bar**: Connection hardware to couple 2 X K9SAT

**KAMIQ K9 Sub fixture**: Fixture to connect interconnection bracket

*\*Specifications subject to change without notice. 01/2023*

#### **Head Office**

Alpha Acoustics  
Vinecká 1,  
293 01 Mladá Boleslav  
Czech Republic  
info@alphacoustics.com

#### **EMEA Office**

Alpha Acoustics DWC-LLC  
BUILDING A3, Office No. DLC-BC-A3-3-OSSD6-04  
Dubai South Business Center,  
Dubai Logistics City  
Dubai, United Arab Emirates